

3 August 2020

HOT WEATHER POLICY OF ALBANY ROWING CENTER

Per the below guidelines of FISA for the Safe Practice of Rowing the policy of Albany Rowing Center have been formed.

“High intensity exercise in a hot environment with associated fluid loss and elevation of body temperature can lead to Dehydration – Heat Exhaustion – Heat Stroke


The heat related problems always start with dehydration and are accompanied by an elevated body core temperature. Exercise further increases heat load on the body. With increased core temperature, energy demands for temperature regulation increase and this further depletes energy resources, particularly glucose stores. These conditions are prerequisites for the heat induced illnesses. However, it should be mentioned, in the case of excessive thermal load, heat exhaustion and heat stroke may occur without dehydration.

Taking into account the above mentioned factors, these levels of risk can be considered for hot, dry and humid days according to the ambient temperature. When available the Wet Bulb Globe Temperature standard, developed for work in the sun, should be used to quantify environmental heat stress.”

WET BULB GLOBAL TEMP	RISK of THERMAL INJURY
78 – 79.9 F	No Risk
80 – 84.9 F	Low
85 – 87.9 F	Moderate
88 – 90 F	High
>90 F	Extreme

Workloads for the WBGT categories of risk of thermal injury were developed by the US Military and adopted by OSHA to determine workload/rest and water consumption for acclimated/unacclimated for light/moderate/heavy work for the above 3 categories.

The coaches will assess the temp and humidity in the sun with the provided Temp/Relative Humidity monitor and use the 2 attached graphs to determine practice loads or if to cancel practice.

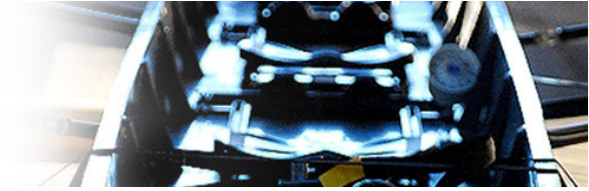


Wet Bulb Globe Temperature (WBGT) from Temperature and Relative Humidity

Temperature in Degrees Fahrenheit

	68.0	69.8	71.6	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	87.8	89.6	91.4	93.2	95.0	96.8	98.6	100.4	102.2	104.0	105.8	107.6	109.4	111.2	113.0	114.8	116.6	118.4	120.2	122.0	
0	59.0	60.8	60.8	62.6	64.4	64.4	66.2	66.2	68.0	68.0	69.8	71.6	71.6	73.4	73.4	75.2	75.2	77.0	77.0	78.8	80.6	80.6	82.4	82.4	84.2	84.2	86.0	87.8	87.8	89.6	89.6	
5	60.8	60.8	62.6	64.4	64.4	66.2	66.2	68.0	69.8	69.8	71.6	71.6	73.4	75.2	75.2	77.0	78.8	78.8	80.6	80.6	82.4	84.2	84.2	86.0	87.8	87.8	89.6	91.4	91.4	93.2	95.0	
10	60.8	62.6	62.6	64.4	66.2	66.2	68.0	69.8	69.8	71.6	73.4	73.4	75.2	77.0	77.0	78.8	80.6	80.6	82.4	84.2	86.0	86.0	87.8	89.6	89.6	91.4	93.2	95.0	96.8	96.8	98.6	
15	62.6	62.6	64.4	66.2	66.2	68.0	69.8	69.8	71.6	73.4	73.4	75.2	77.0	78.8	78.8	80.6	82.4	84.2	84.2	86.0	87.8	89.6	89.6	91.4	91.4	93.2	95.0	96.8	98.6	100.4	102.2	
20	62.6	64.4	64.4	66.2	68.0	69.8	69.8	71.6	73.4	75.2	75.2	77.0	78.8	80.6	80.6	82.4	84.2	86.0	87.8	89.6	89.6	91.4	93.2	95.0	96.8	96.8	98.6	100.4	102.2			
25	64.4	64.4	66.2	68.0	68.0	69.8	71.6	73.4	75.2	75.2	77.0	78.8	80.6	82.4	82.4	84.2	86.0	87.8	89.6	91.4	93.2	95.0	96.8	96.8	98.6	100.4	102.2					
30	64.4	66.2	68.0	68.0	69.8	71.6	73.4	73.4	75.2	77.0	78.8	80.6	82.4	84.2	84.2	86.0	87.8	89.6	91.4	93.2	95.0	96.8	96.8	98.6	102.2							
35	64.4	66.2	68.0	69.8	71.6	73.4	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	87.8	89.6	91.4	93.2	95.0	96.8	96.8	100.4	102.2									
40	66.2	68.0	69.8	69.8	71.6	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	87.8	89.6	91.4	93.2	95.0	96.8	96.8	100.4	102.2										
45	66.2	68.0	69.8	71.6	73.4	75.2	77.0	78.8	80.6	80.6	82.4	84.2	86.0	89.6	91.4	93.2	95.0	96.8	96.8	100.4												
50	68.0	69.8	71.6	73.4	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	87.8	91.4	93.2	95.0	96.8	96.8	100.4													
55	68.0	69.8	71.6	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	87.8	89.6	93.2	95.0	96.8	96.8	100.4														
60	69.8	71.6	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	87.8	89.6	91.4	95.0	96.8	96.8	100.4															
65	69.8	71.6	73.4	75.2	77.0	78.8	80.6	82.4	84.2	87.8	89.6	91.4	93.2	96.8	96.8	100.4																
70	71.6	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	87.8	91.4	93.2	95.0	96.8	100.4	102.2																
75	71.6	73.4	75.2	77.0	78.8	80.6	84.2	86.0	87.8	89.6	91.4	95.0	96.8	96.8	102.2																	
80	73.4	75.2	77.0	78.8	80.6	82.4	84.2	86.0	89.6	91.4	93.2	96.8	96.8	100.4																		
85	73.4	75.2	77.0	78.8	82.4	84.2	86.0	87.8	89.6	93.2	95.0	96.8	100.4	102.2																		
90	75.2	77.0	78.8	80.6	82.4	84.2	87.8	89.6	91.4	95.0	96.8	96.8	102.2																			
95	75.2	77.0	78.8	80.6	84.2	86.0	87.8	91.4	93.2	95.0	96.8	100.4																				
100	75.2	78.8	80.6	82.4	84.2	87.8	89.6	91.4	95.0	96.8	100.4	102.2																				

WBGT > 104

NOTE: This table is compiled from an approximate formula which only depends on temperature and humidity. The formula is valid for full sunshine and a light wind. Table adapted from Bureau of Meteorology

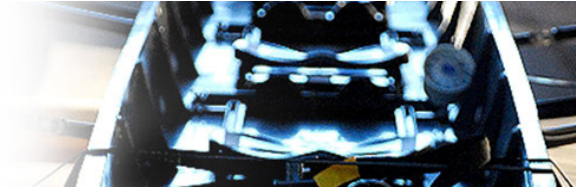

Wet Bulb Globe Temperature Category Work/Rest and Water Intake

08/07/15

Unacclimated and Acclimated Work/Rest and Water Intake Chart

Heat Risk Category		Wet Bulb Globe Temp	Light Work		Moderate Work		Heavy Work	
			Work/Rest	Water Intake (quart/hr)	Work/Rest	Water Intake (quart/hr)	Work/Rest	Water Intake (quart/hr)
No Risk	Unacclimated	78 – 79.9	50/10 min	1/2	40/20 min	3/4	30/30 min	3/4
	Acclimated	78 – 79.9	continuous	1/2	continuous	3/4	50/10 min	3/4
Low	Unacclimated	80 – 84.9	40/20 min	1/2	30/30 min	3/4	20/40 min	1
	Acclimated	80 – 84.9	continuous	1/2	50/10 min	3/4	40/20 min	1
Moderate	Unacclimated	85 – 87.9	30/30 min	3/4	20/40 min	3/4	10/50 min	1
	Acclimated	85 – 87.9	continuous	3/4	40/20 min	3/4	30/30 min	1
High	Unacclimated	88 – 90	20/40 min	3/4	10/50 min	3/4	avoid	1
	Acclimated	88 – 90	continuous	3/4	30/30 min	3/4	20/40 min	1
Extreme	Unacclimated	> 90	10/50 min	1	avoid	1	avoid	1
	Acclimated	> 90	50/10 min	1	20/40 min	1	10/50 min	1

Adapted from: 1) USGS Survey Manual, Management of Occupational Heat Stress, Chapter 45, Appendix A. 2) Manual of Naval Preventive Medicine, Chapter 3: Prevention of Heat and Cold Stress Injuries. 3) OSHA Technical Manual Section III: Chapter 4 Heat Stress. 4) National Weather Service Tulsa Forecast Office, Wet Bulb Globe Temperature.